


PRODUCT DATA SHEET 9

**BEVELED STRAIGHT SECTION
with side reinforcement anti-elongation
hardness 50 SH**

Contatto a sezione retta/svasata con protezioni inox superiore antiusura
e inox laterale anti-allungamento

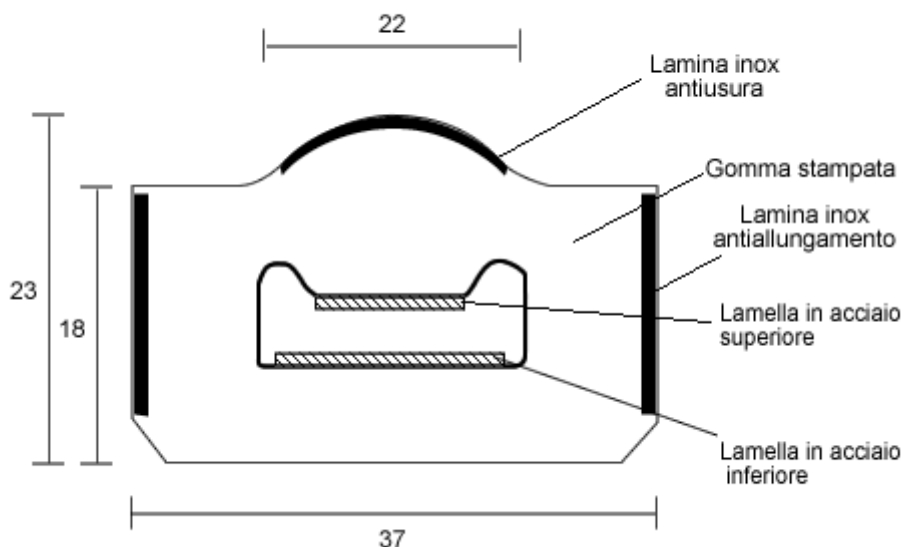

Guaranteed minimum performance characteristics	
Overtaking speed of vehicles:	÷ 0.80 km/h
Activation pressure:	10 ÷ 25 kg/cm ²
Activation Speed:	< 1ms @ 12V
Downtime:	> 1 ms
Operating Ambient Temperature:	-30 ÷ 60° C
Electrical resistance of the sensor at rest:	> 500 mΩ
Product Lifespan:	1 year or 2 million passes

Conditions that must be met to ensure the minimum shelf life of the product:

1. During installation and operation, the sensors must not be punctured or damaged by sharp objects.
2. The pull of the cable should not exceed 20 kg.
3. The entire flat part of the sensor head must be protected by a steel sheet.
4. During operation, the bracket under the sensor must always be kept clean to prevent breakage.
5. The straight contacts should be glued to the bracket, both at the base and on the sides.
- 6.

Date of last update:

20 / 06 / 2019

Signing of the
Address: _____